

# Synel SY-Interlock

Isolate potential threats and enhance security of your organization

SY-Interlock is an independent hardware that is combined within Synel's access control system, and complement Synel's various access control solutions.


The SY-Interlock controller regulates access to a closed chamber with two doorways, where only one chamber door (or more, by cascading) can be open at a time.

When SY-Interlock controller receives a request to open a door, it checks whether the other chamber door is open. Only if the other chamber door is closed does the SY-Interlock controller permit access to the chamber and opens the door. If the other chamber door is open, the SY-Interlock controller does not permit access to the chamber and does not permit opening the door.

- It is possible to cascade several units to monitor lock chamber with multiple outlets (more than two).
- The control can be set-up defining several parameters by connecting a PRX-30/SY-10 reader with a keyboard.

Most suitable for:

- Embassies (secure entry rooms)
- Clean rooms
- Encoded rooms
- Bank safes

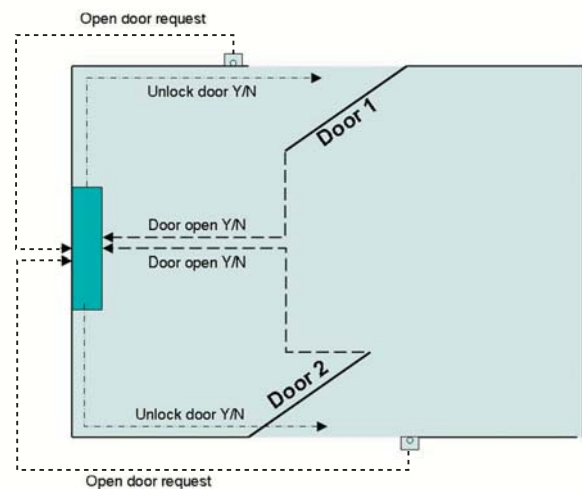

Synel Industries Ltd.

Yokneam Industrial Park,  
POB 142, Yokneam 20692, Israel  
Tel: +972-4-9596760 Fax: +972-4-9590729  
e-mail: info@synel.co.il site: www.synel.com

Pictures in this brochure are for illustration purposes only.  
The technical data sheet packed with the product is the  
only obligatory source of technical information

